

NEW!



All Purpose Cable Lockout

- Can be used to lock out valves, disconnect switches, circuit breakers and more
- Locks out multiple control points with a single device = reduced equipment costs
- Interchangeable cables, select the best type suited for the job
- The ergonomic, hand-fitted body makes it easy to get the cable tight
- High portability, a built-in eyelet helps keep the cable neatly coiled, prevents loose ends from dangling and causing a hazard when in use
- Body made of rugged impact-resistant nylon, withstands chemicals and corrosion
- Accommodates cables with a diameter from 1.59 to 4.77 mm
- 4 padlock holes
- Max. shackle diameter: 7 mm
- Min. shackle clearance: 20 mm
- Packaging: 1 piece



Part No.	Description
050941	APCLO with Nonconductive Nylon Cable (2.44 m)
050943	APCLO with Vinyl Coated Metal Cable (2.44 m)



Nonconductive Nylon Cables (without device)

Part No.	Description	Diameter
050945	Nylon Cable – 2.44 m	3.18 mm
050948	Nylon Cable – 3.65 m	3.18 mm

Sheathed Metal Cables (without device)

Part No.	Description	Diameter
050947	Vinyl Coated Metal Cable – 2.44 m	4.76 mm
050950	Vinyl Coated Metal Cable – 3.65 m	4.76 mm

NEW!



Mini Cable Lockout

- Locks out valves as well as disconnected switches and circuit breakers
- 1 device for both electrical and mechanical lockout applications saves time and money
- Fits in the palm of your hand and is easily stowed away in your toolbox
- Cable stored internally: works just like a tape measure, prevents cable from getting tangled
- Push-button self-winding mechanism automatically holds cable tight
- The sheathed metal cable provides extra strength for getting a tight fit on valves and levers
- Superior chemical, corrosion and temperature resistance
- Comes with vinyl-coated steel cable or nonconductive nylon cable
- 6 padlocks can be applied
- Max. shackle diameter: 7 mm
- Min. shackle clearance: 20 mm
- Packaging: 1 piece



Part No.	Description	Dimensions Body	Dimensions Cable
050940	Mini Cable Lockout w/ steel cable	Ø 10 cm x 4.5 cm D	Ø 1.6 mm x 2.44m
051442	Mini Cable Lockout w/ nylon cable	Ø 10 cm x 4.5 cm D	Ø 1.6 mm x 2.44m



NEW!



Universal Valve Lockout

Lockout gate valves by using the cable attachment with the Universal Valve Lockout. See page 24 for more information. For this lockout format you would need to order:


Part No.	Description
050924	Small Universal Valve Lockout Base Clamping Unit
050899	Large Universal Valve Lockout Base Clamping Unit
051395	Cable attachment w/ 2.44 metre sheathed cable

Mechanical Risk – Gate Valves



Cable Lockout Device

- Locks out gate valves, gas cylinders, electrical devices...
- Comes with 1.8 or 3 m steel cable and unique hasp lockout device
- **Room for 6 padlocks**
- Provide extra information by combining the device with a tag (page 47)
- Max. shackle diameter: 9 mm
- Min. shackle clearance: 15 mm
- Packaging: 1 piece

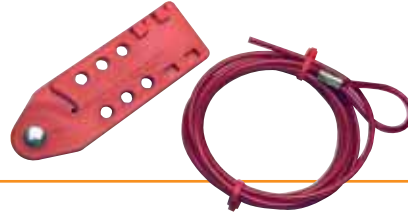

Part No.	Description
800112	Cable lockout device + 1.8 m cable
800113	Additional cable 1.8 m
800114	Cable lockout device + 3 m cable
800115	Additional cable 3 m



Scissor-Lok™ Lockout Device

- Locks out multiple gate valves simultaneously
- Secures power cords, freestanding equipment, tanks, cylinders of safety guards...
- Made of heavy-duty chemical resistant nylon
- The cable and device can be combined in several ways (see examples)
- Available with either a 0.91 m or 3.04 m vinyl coated cable.
- When using own cable, the outside diameter must be 4.76 mm or less.
- **3 Padlocks can be applied**
- Provide extra information by combining the device with a tag (page 47)
- Max. shackle diameter: 7 mm
- Min. shackle clearance: 19.5 mm
- Packaging: 1 piece



Part No.	Description
236921	Scissor Lok - 0.91 m
236922	Scissor Lok - 3 m



PRO-LOCK II® Cable Lockout Device

- Can only be opened and locked by using special tool provided
- Compact and lightweight
- Moulded from an impact polymer polypropylene with stainless steel internal parts.
- UV stabilized
- Temperature resistance range: -50°C to 55°C
- Diameter PRO-LOCK: 50 mm
- Cable length: 1.50 m
- Max. shackle diameter: 6.5 mm
- Min. shackle clearance: 20 mm
- Packaging: 1 piece



Other cable lengths are available upon request

Part No.	Description	Material	Colour
225203	Pro-Lock + 1.5 cable	Polypropylene moulding & stainless steel	Red
225204	Pro-Lock + 1.5 cable	Polypropylene moulding & stainless steel	Green
225205	Pro-Lock + 1.5 cable	Polypropylene moulding & stainless steel	Yellow
225206	Operating tool	Polypropylene	Red
225207	Operating tool	Polypropylene	Green
225208	Operating tool	Polypropylene	Yellow