

# Mechanical Risk – Universal

**NEW!**

## Universal Valve Lockout: one device does it all!

The Universal Lockout device is a modular system which enables you to lock out valves of different types and sizes. No other device offers such flexibility and security. There are two sizes available: large and small.

- Modular system makes your investment economical and flexible
- Can be used to lock out large levers, T-handles and other hard-to-secure mechanical devices
- New open-ended clamp fits over closed rings, wide handles
- Locks out valves in **open and closed positions**
- Made from industrial-grade steel and nylon for rugged durability, chemical and corrosion resistance
- Max. shackle diameter: 9 mm
- Min. shackle clearance: 20 mm

Part No.	Description
050924	Small Universal Valve Lockout Base Clamping Unit
050899	Large Universal Valve Lockout Base Clamping Unit
065402	Small Blocking Arm
065403	Large Blocking Arm
051395	Cable attachment w/ 2.44 metre sheathed cable Cable diameter 3.25 mm




The Universal Lockout is a modular construction where the user can add various accessories to make the device suitable for a range of valves. Simply disassemble the device (as shown in picture) and slot in the relevant accessory.



**Maximum valve handle width**  
 Small Lockout: 25 mm    Large Lockout: 41 mm

---

**Maximum handle thickness:**  
 Small Lockout: 19 mm    Large Lockout: 31.75 mm

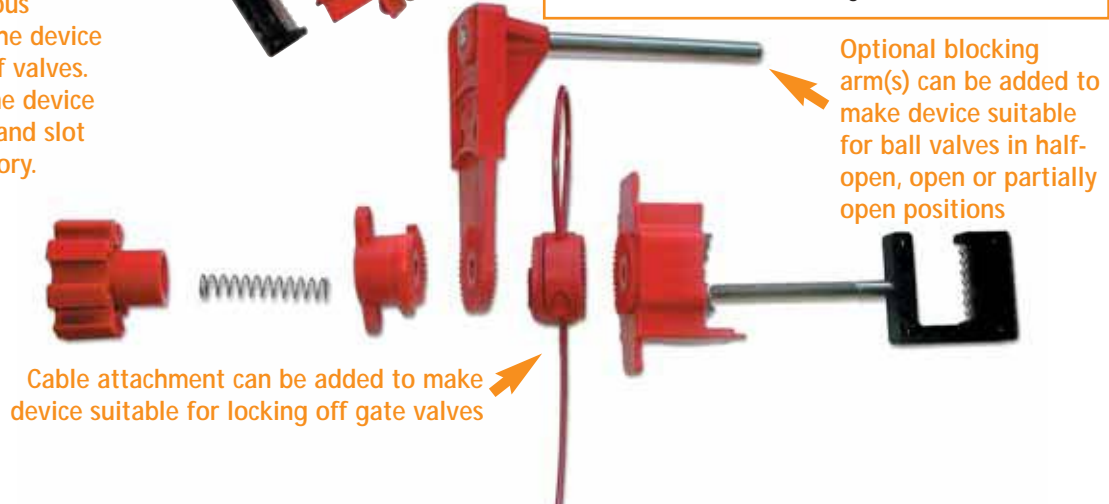

Cable attachment can be added to make device suitable for locking off gate valves

Optional blocking arm(s) can be added to make device suitable for ball valves in half-open, open or partially open positions



Clamp attaches to butterfly valve lever, preventing trigger handle from being squeezed. Valve cannot be repositioned!



Use blocking arm to lock out quarter-turn ball valves



Use cable attachment to lock out gate valves



Use two blocking arms to lock out 3-, 4- or 5-way valves, or to lock valves in the throttled position for operational control